


| Part # | I _{max} (Amps) | Q _{max} (Watts) | V _{max} (Volts) | DT _{max} (°C) | T _{max} (°C) |
|------------------------|-------------------------|--------------------------|--------------------------|------------------------|-----------------------|
| 19911-5L31-06CQ | 6.0 | 88.5 | 24.0 | 67°C | 125°C |

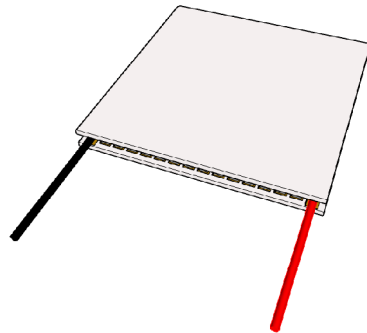

Lapped

X_n Codes:

X₂=Wire type. See Wire type codes or call for custom wires.

X₃=Height Tolerance specification. See Tolerance codes or call for custom tolerances.

X₄=Options. See Options codes or call for custom options.

| Bottom Plate | | | | Top Plate | | | | Metallized Height | | Lapped Height | |
|--------------|------|------|------|-----------|------|------|------|-------------------|----|---------------|------|
| A | | B | | C | | D | | H | | H | |
| mm | in | mm | in | mm | in | mm | in | mm | in | mm | in |
| 40.0 | 1.57 | 40.0 | 1.57 | 40.0 | 1.57 | 40.0 | 1.57 | NA | NA | 4.1 | .161 |

